




Flow Rates Peristaltic Pump

Model No. : LabF1

Flow Rate : 0.0002-645mL/min

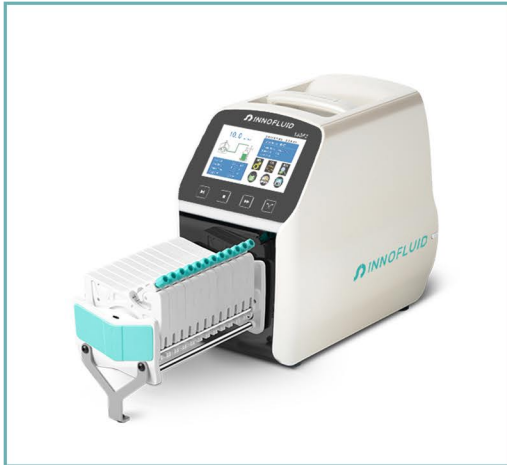

Product Features

Imported 4.3" industrial grade color LCD screen display, with touch screen control.

Can preset dispensing volume, dispensing time, pause time and copy numbers.

With intelligent calibration function and online micro adjusting function.


The pump can store 60 commonly used filling modes.

Back suction angle setting, avoid liquid drop off when the pump stops working.

Two working mode:Volume dispensing and speed dispensir(special for viscous liquid)

Can communicate with balance, closed-loop control.

Screen Display

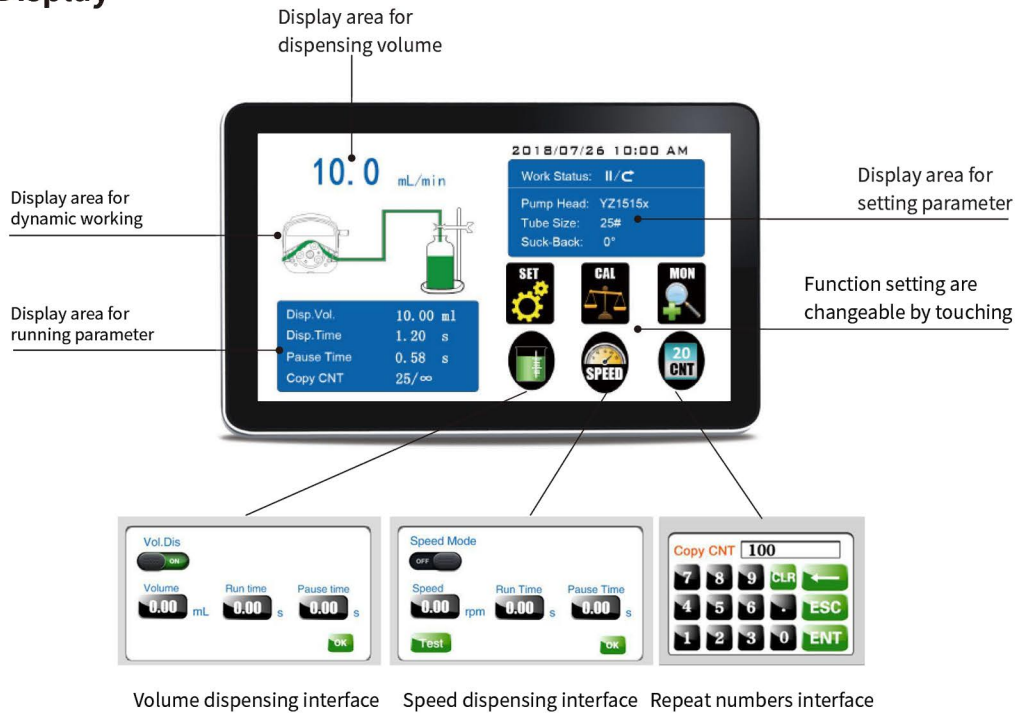

Pump Head



Drive	Pump head	Tubing Size	Speed	Flow rate (mL/min)
LabF1	EasyPumpI/III	13#,14#,19#,16#,25#,17#,18#	0.1-150rpm	0.0053-645
	EasyPumpII/IV	15#,24#		0.18-410
	EasyPumpV/VI	13#,14#,19#,16#,25#		0.0053-295
	2*EasyPumpI/III	13#,14#,19#,16#,25#		0.0053-295
	2*EasyPumpII/IV	15#		0.18-270
	2*EasyPumpV/VI	13#,14#,19#,16#		0.0053-140
	AMC1-AMC12(10)	ID:0.13-3mm,Wall thickness:0.8-1mm		0.0002-48(suggestion working speed≤150rpm)
	AMC1-AMC12(6)	ID:0.13-3mm,Wall thickness:0.8-1mm		0.0002-65(suggestion working speed≤150rpm)
	YZ1515x	13#,14#,19#,16#,25#,17#,18#		0.007-570
YZ2515x	15#,24#	0.17-435		

Technical Specifications

Flow rate range	0.0002-570mL/min	Keypad lifetime	300,000 times
Speed range	0.1-150rpm	Start/stop, direction signal	Passive switch signal, such as foot pedal switch; Active switch signal: 5-24V universal
Speed resolution	0.01rpm		
Dispensing volume range	0.1-9999.99mL	Output interface	Output motor working status (Open-Collector output)
Dispensing volume resolution	0.01mL		
Dispensing time	0.1-9999.99S	Communication interface	RS232, RS485 Modbus protocol (RTU mode)
Pause time	0.1-9999.99S		
Time resolution	0.01s	Power supply	AC 220V±10% 50Hz/60Hz (standard) AC 110V±10% 50Hz/60Hz (optional)
Copy numbers	1-9999 times, setting'0'means unlimited		
Back suction angle	0-360°	Drive dimension (L×W×H)	261.4×157.3×236.9 mm
Dispensing accuracy	< +0.5%	Drive weight	4.40 kg
Motor type	Stepper motor	Power consumption	< 80W
Display	Industrial grade 4.3" color LCD display	Condition temperature	0-40°C
Control method	Touch screen and Mechanical keypad	Relative humidity	< 80%

Dimension Drawing (Unit:mm)

